

EYE Clean Ace 高顯色性金鹵泡

EYE Clean Ace

(需配合標準汞泡鎮流器使用 For use with Mercury ballast without ignitor.)

日本製造
Made in Japan

(6500K Ra:90)

燈泡參數

PHYSICAL DATA AND CHARACTERISTICS

| 型號 Type | 功率 Watts (W) | 燈泡 Bulb | 燈頭 Base | 每箱 數量 Std. Pkg. Qty. | 總長度 M.O.L. (mm) | 至光源 中長度 L.C.L. (mm) | 燈泡 電壓 Lamp Voltage (V) | 燈泡 電流 Lamp Current (A) | 初始 流明 Initial Lumens (lm) | 顯色 指數 Ra | 平均 壽命 Rated Av. Life (hrs) | 燃點 位置 Burning Position | 圖 Fig. No. |
|------------|--------------------|------------|------------|----------------------------------|-----------------------|------------------------------|------------------------------------|------------------------------------|------------------------------------|----------------|--|---------------------------------|------------------|
|------------|--------------------|------------|------------|----------------------------------|-----------------------|------------------------------|------------------------------------|------------------------------------|------------------------------------|----------------|--|---------------------------------|------------------|

Tubular



| | | | | | | | | | | | | | |
|-------------|-----|-----|-----|----|-----|-----|-----|------|---------------|----|--------|---------|---|
| MT250DL | 250 | T48 | E40 | 12 | 250 | 160 | 130 | 2.13 | 18200V 14800H | 90 | 10000V | Any | 1 |
| MT400DL/BH | 400 | T55 | E40 | 12 | 292 | 185 | 135 | 3.25 | 29000 | 90 | 12000 | BH±15° | 2 |
| MT400DL/BUD | 400 | T48 | E40 | 12 | 295 | 185 | 135 | 3.25 | 32000 | 90 | 12000 | BUD±15° | 3 |

BT Coated



| | | | | | | | | | | | | | |
|---------|-----|-------|-----|----|-----|---|-----|------|---------------|----|-------|-----|---|
| MF250DL | 250 | BT100 | E40 | 12 | 250 | — | 130 | 2.13 | 14500V 13500H | 90 | 10000 | Any | 4 |
| MF400DL | 400 | BT116 | E40 | 12 | 292 | — | 135 | 3.25 | 24500V 23000H | 90 | 12000 | Any | 5 |


BT Clear



| | | | | | | | | | | | | | |
|--------|-----|-------|-----|----|-----|-----|-----|------|---------------|----|-------|-----|---|
| M250DL | 250 | BT100 | E40 | 12 | 250 | 160 | 130 | 2.13 | 15500V 14500H | 90 | 10000 | Any | 4 |
| M400DL | 400 | BT116 | E40 | 12 | 292 | 185 | 135 | 3.25 | 26500V 25000H | 90 | 12000 | Any | 5 |

備註：1.只適合用於有前置保護玻璃的燈具內。
2.燈泡電壓及電流數值會隨供應電壓的變化而有所不同。

NOTE: 1. For use in enclosed fixtures only.
2. Values in lamp voltage and lamp current stated in the above table will vary somewhat according to the supply voltage.

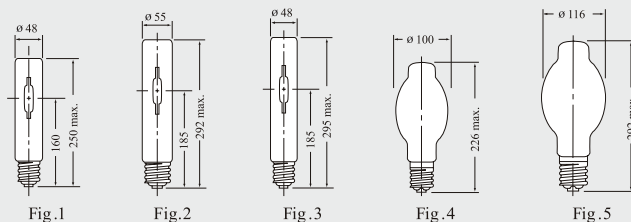

超卓的顯色表現，使這金鹵泡擁有非常接近自然日光的特質。

特點：

- 6500K 超高色溫。
- 擁有超卓顯色指數Ra: 90。
- 適合各行各業的商店展示照明，廣告照明等。同時適合要求高的工商業照明，包括水族照明。
- 需配合標準汞泡鎮流器使用。

With its excellent colour rendering properties, this metal halide lamp features a light colour close to natural daylight.

Features :

- High colour temperature 6500K.
- High colour rendering Ra 90.
- The light is suitable for various retail applications, and signboards, as well as critical commercial and industrial colour applications including aquatic applications.
- Operates on standard high pressure mercury ballast without ignitor.