

EYE Sunlux 高壓鈉泡

EYE Sunlux HPS Lamp

日本製造
Made in Japan

(2100K Ra 17-25)

燈泡參數

PHYSICAL DATA AND CHARACTERISTICS

型號 Type	功率 Watts (W)	燈泡 Bulb	燈頭 Base	每箱 數量 Std. Pkg. Qty.	總長度 M.O.L (mm)	至光源 中長度 L.C.L (mm)	燈泡 電壓 Lamp Voltage (V)	燈泡 電流 Lamp Current (A)	初始 流明 Initial Lumens (lm)	平均 壽命 Rated Av. Life (hrs)	圖 Fig. No.
------------	--------------------	------------	------------	-------------------------------	-------------------	--------------------------	---------------------------------	---------------------------------	------------------------------------	-------------------------------------	---------------

E & BT Diffuse

NH100F	100	E75	E40	12	186	—	100	1.20	9500	24000	1
NH150F	150	E90	E40	12	226	—	100	1.80	14000	24000	2
NH250F	250	E90	E40	12	226	—	100	3.00	25800	24000	2
NH400F	400	E120	E40	12	285	—	105	4.45	47800	24000	3
NH700F	700	BT150	E40	6	375	—	105	7.50	84000	24000	4
NH1000F	1000	BT180	E40	6	395	—	110	10.30	125000	24000	5

E & BT Clear

NH100	100	E75	E40	12	186	127	100	1.20	10000	24000	1
NH150	150	E90	E40	12	226	146	100	1.80	14500	24000	2
NH250	250	E90	E40	12	226	146	100	3.00	27500	24000	2
NH400	400	E120	E40	12	285	185	105	4.45	50000	24000	3
NH700	700	BT150	E40	6	375	240	105	7.50	88000	24000	4
NH1000	1000	BT180	E40	6	395	245	110	10.30	133000	24000	5

E70 Bulb Diffuse

NH50F/HV/70S	50	E70	E27	24	153	—	85	0.76	3800	16000	6
NH50F/N/HV/70S*	50	E70	E27	24	153	—	85	0.76	3800	16000	6
NH70F/HV/70S	70	E70	E27	24	153	—	90	0.98	5800	16000	6
NH70F/N/HV/70S*	70	E70	E27	24	153	—	90	0.98	5800	16000	6

E70 Bulb Clear

NH50/HV/70S	50	E70	E27	24	153	98	85	0.76	4000	16000	6
NH50/N/HV/70S	50	E70	E27	24	153	98	85	0.76	4000	16000	6
NH70/HV/70S	70	E70	E27	24	153	98	90	0.98	6000	16000	6
NH70/N/HV/70S	70	E70	E27	24	153	98	90	0.98	6000	16000	6

備註: ● 標誌的解釋


HV: 高電壓
S: 軟身外泡
H: 硬身外泡
N: 不需外置觸發器
F: 擴散型外泡

- 初始流明代表燈泡經100小時操作後的數值。
- 任何角度的燃點位置。

Notes: ● Meaning of symbols-

HV: High Voltage
S: Soft Bulb
H: Hard Bulb
N: No external ignitor is required
F: Diffuse Bulb

- Initial lumens is the value after 100 hrs of operation.
- Burning position: Any

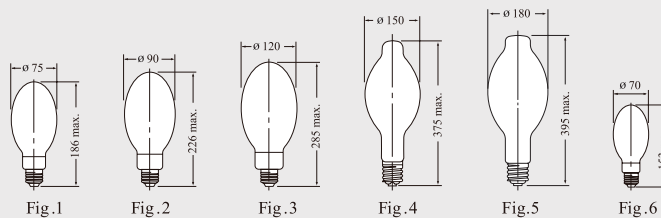

高效率的高壓鈉泡，使產品可靠耐用。

High pressure sodium lamps, long reliable lamp life.

特色:

- 透過優秀的質量和科技，使產品可靠耐用。
- Ra 17-25, CCT=2100K

Features:

- Long reliable lamp life by superior quality and technology.
- Ra 17-25, CCT=2100K