

MR16 有面鹵鎢燈

MR16 halogen lamp with cover glass

日本製造
Made in Japan

燈泡參數 PHYSICAL DATA AND CHARACTERISTICS

型號 Type	美式代碼 Ref. ANSI	電壓 Volts (V)	功率 Watts (W)	燈頭 Base	每箱數量 Std. Pkg. Qty.	軸心光強值 Axis Cd (cd)	色溫 Colour Temp. (K)	光束角度 Beam Angle (°)	平均壽命 Rated Av. Life (hrs)
JR1251	ESX	12	20	GU5.3	12	4000	2950	9	4000
JR1252	BBF	12	20	GU5.3	12	880	2950	23	4000
JR1253	BAB	12	20	GU5.3	12	500	2950	38	4000
JR1351	FRB	12	35	GU5.3	12	7600	3050	12	5000
JR1352	FRA	12	35	GU5.3	12	2300	3050	23	5000
JR1353	FMW	12	35	GU5.3	12	1100	3050	38	5000
JR1451	EYR	12	42	GU5.3	12	7500	3050	12	5000
JR1452	EYS	12	42	GU5.3	12	2600	3050	25	5000
JR1453	EYP	12	42	GU5.3	12	1100	3050	38	5000
JR1551	EXT	12	50	GU5.3	12	9800	3050	13	5000
JR1552	EXZ	12	50	GU5.3	12	3200	3050	26	5000
JR1553	ENL	12	50	GU5.3	12	2250	3050	32	5000
JR1554	EXN	12	50	GU5.3	12	1600	3050	38	5000
JR1566	FNV	12	50	GU5.3	12	700	3050	55	5000
JR2651	FPA	12	65	GU5.3	12	12000	3050	13	5000
JR2652	FPC	12	65	GU5.3	12	4100	3050	26	5000
JR2653	FPB	12	65	GU5.3	12	2100	3050	38	5000
JR2751	EYF	12	75	GU5.3	12	12700	3050	13	5000
JR2752	EYJ	12	75	GU5.3	12	4400	3050	26	5000
JR2753	EYC	12	75	GU5.3	12	2200	3050	44	5000



* 另有釘頭系列可供選擇 * DC bayonet base is also available.

MR16 低壓有面石英鹵鎢燈。

MR16 low voltage halogen lamp with cover glass.

特色：

- 精確的光學設計。
- 持久耐用冷光燈杯。
- 耐用長壽。
- 適用於商店，酒廊，辦公室，風景照明，商品展出及家居等場合。

Features :

- Precise optical design.
- Long lasting dichroic coating.
- Reliable long life.
- Suitable for retail stores, lounges, offices, landscape lighting, display cases and homes.

20W

Beam angle: 9°

ø (m)	H (m)	E (lx)
0.16	1	4000
0.31	2	1000
0.47	3	440

Beam angle: 23°

ø (m)	H (m)	E (lx)
0.41	1	880
0.82	2	220
1.23	3	100

Beam angle: 38°

ø (m)	H (m)	E (lx)
0.69	1	500
1.38	2	120
2.07	3	50

35W

Beam angle: 12°

ø (m)	H (m)	E (lx)
0.21	1	7600
0.42	2	1900
0.63	3	840

Beam angle: 23°

ø (m)	H (m)	E (lx)
0.40	1	2300
0.80	2	580
1.20	3	260

Beam angle: 38°

ø (m)	H (m)	E (lx)
0.69	1	1100
1.38	2	270
2.07	3	120

42W

Beam angle: 12°


ø (m)	H (m)	E (lx)
0.19	1	7500
0.38	2	1880
0.57	3	830

Beam angle: 25°

ø (m)	H (m)	E (lx)
0.40	1	2600
0.80	2	650
1.20	3	285

Beam angle: 38°

ø (m)	H (m)	E (lx)
0.69	1	1100
1.38	2	280
2.07	3	120

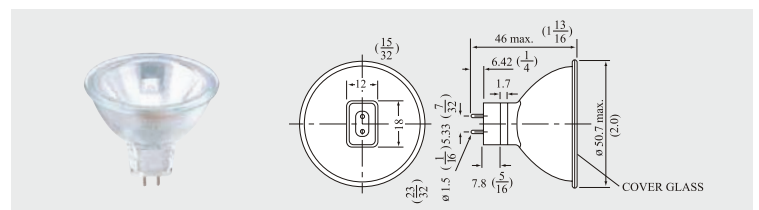

50W

Beam angle: 13°

ø (m)	H (m)	E (lx)
0.23	1	9800
0.46	2	2450
0.69	3	1090

Beam angle: 26°

ø (m)	H (m)	E (lx)
0.46	1	3200
0.92	2	800
1.38	3	350

Beam angle: 32°

ø (m)	H (m)	E (lx)
0.57	1	2250
1.14	2	560
1.71	3	250

Beam angle: 38°

ø (m)	H (m)	E (lx)
0.69	1	1600
1.38	2	400
2.07	3	180

Beam angle: 55°

ø (m)	H (m)	E (lx)
0.96	1	700
1.92	2	175
2.88	3	77

65W

Beam angle: 13°

ø (m)	H (m)	E (lx)
0.23	1	12000
0.46	2	3000
0.69	3	1330

Beam angle: 26°

ø (m)	H (m)	E (lx)
0.46	1	4100
0.92	2	1030
1.38	3	460

Beam angle: 38°

ø (m)	H (m)	E (lx)
0.68	1	2100
1.36	2	530
2.04	3	230

75W

Beam angle: 13°

ø (m)	H (m)	E (lx)
0.23	1	12700
0.46	2	3175
0.69	3	1411

Beam angle: 26°

ø (m)	H (m)	E (lx)
0.46	1	4400
0.92	2	1100
1.38	3	489

Beam angle: 44°

ø (m)	H (m)	E (lx)
0.81	1	2200
1.62	2	550
2.43	3	244

