

MR11 有面鹵鎢燈

MR11 Halogen lamp with cover glass

日本製造
Made in Japan

燈泡參數 PHYSICAL DATA AND CHARACTERISTICS

型號 Type	美式代碼 Ref. ANSI	電壓 Volts (V)	功率 Watts (W)	燈頭 Base	每箱數量 Std. Pkg. Qty.	軸心光強值 Axis Cd (cd)	色溫 Colour Temp. (K)	光束角度 Beam Angle (°)	平均壽命 Rated Av. Life (hrs)
JM1161	FTA	12	12	GZ4	50	1500	2800	10	2000
JM1162	—	12	12	GZ4	50	840	2800	20	2000
JM1163	—	12	12	GZ4	50	480	2800	34	2000
JM1261	FTB	12	20	GZ4	50	3750	2950	10	2000
JM1262	FTC	12	20	GZ4	50	1360	2950	20	2000
JM1263	FTD	12	20	GZ4	50	900	2950	34	2000
JM1361	FTE	12	35	GZ4	50	4200	3050	10	3000
JM1362	FTF	12	35	GZ4	50	2350	3050	20	3000
JM1363	FTH	12	35	GZ4	50	1300	3050	34	3000



12W

Beam angle: 10°

ø (m)	H (m)	E (lx)
0.18	1	1500
0.35	2	375
0.52	3	170

Beam angle: 20°

ø (m)	H (m)	E (lx)
0.35	1	840
0.70	2	210
1.05	3	95

Beam angle: 34°

ø (m)	H (m)	E (lx)
0.59	1	480
1.19	2	120
1.78	3	55

20W

Beam angle: 10°

ø (m)	H (m)	E (lx)
0.18	1	3750
0.35	2	940
0.52	3	420

Beam angle: 20°

ø (m)	H (m)	E (lx)
0.35	1	1360
0.70	2	340
1.05	3	150

Beam angle: 34°

ø (m)	H (m)	E (lx)
0.59	1	900
1.19	2	230
1.78	3	100

35W

Beam angle: 10°


ø (m)	H (m)	E (lx)
0.18	1	4200
0.35	2	1050
0.53	3	470

Beam angle: 20°

ø (m)	H (m)	E (lx)
0.35	1	2350
0.70	2	590
1.06	3	260

Beam angle: 34°

ø (m)	H (m)	E (lx)
0.59	1	1300
1.19	2	330
1.78	3	145

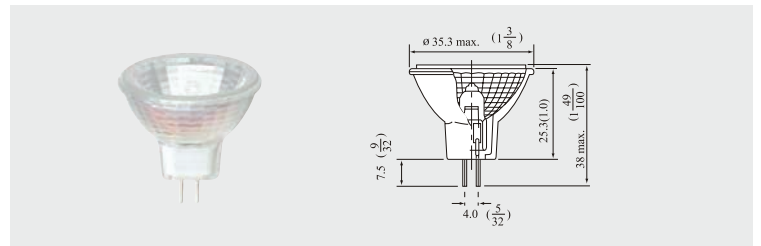

MR11 無面鹵鎢燈

MR11 Halogen lamp without cover glass

燈泡參數 PHYSICAL DATA AND CHARACTERISTICS

型號 Type	美式代碼 Ref. ANSI	電壓 Volts (V)	功率 Watts (W)	燈頭 Base	每箱數量 Std. Pkg. Qty.	軸心光強值 Axis Cd (cd)	色溫 Colour Temp. (K)	光束角度 Beam Angle (°)	平均壽命 Rated Av. Life (hrs)
JM1111	FTA	12	12	GZ4	50	1500	2900	8	2000
JM1112	—	12	12	GZ4	50	500	2900	19	2000
JM1113	—	12	12	GZ4	50	350	2900	25	2000
JM1211	FTB	12	20	GZ4	50	4200	2950	8	2000
JM1212	FTC	12	20	GZ4	50	1450	2950	19	2000
JM1213	FTD	12	20	GZ4	50	700	2950	28	2000
JM1311	FTE	12	35	GZ4	50	6000	3050	10	3000
JM1312	FTF	12	35	GZ4	50	2500	3050	20	3000
JM1313	FTH	12	35	GZ4	50	1350	3050	29	3000



* 另有釘頭系列可供選擇

* DC bayonet base is also available.

12W

Beam angle: 8°

ø (m)	H (m)	E (lx)
0.14	1	1500
0.28	2	375
0.42	3	167

Beam angle: 19°

ø (m)	H (m)	E (lx)
0.33	1	500
0.66	2	125
0.99	3	56

Beam angle: 25°

ø (m)	H (m)	E (lx)
0.54	1	350
1.07	2	88
1.61	3	39

20W

Beam angle: 8°

ø (m)	H (m)	E (lx)
0.18	1	4200
0.35	2	1050
0.53	3	467

Beam angle: 19°

ø (m)	H (m)	E (lx)
0.35	1	1450
0.70	2	363
1.05	3	161

Beam angle: 28°

ø (m)	H (m)	E (lx)
0.61	1	700
1.22	2	175
1.83	3	78

35W

Beam angle: 10°

ø (m)	H (m)	E (lx)
0.18	1	6000
0.35	2	1500
0.53	3	667

Beam angle: 20°

ø (m)	H (m)	E (lx)
0.35	1	2500
0.70	2	625
1.05	3	278

Beam angle: 29°

ø (m)	H (m)	E (lx)
0.61	1	1350
1.22	2	338
1.83	3	150

特色：

- 精確的光學設計。
- 持久耐用冷光燈杯。
- 耐用長壽。
- 適用於商店，酒廊，辦公室，風景照明，商品展示及家居等。

Features:

- Precise optical design.
- Long lasting dichroic coating.
- Reliable long life.
- Suitable for retail stores, lounges, offices, landscape lighting, display cases and homes.